

AUTROL®

HART
COMMUNICATION PROTOCOL



DOC. NO.: C3200-E04A

Smart Pressure Transmitter

for Gauge and Absolute Pressure Measurement



MODEL
APT3200

APT3200



Standard



SST Housing


Description of Product

The APT3200 Smart Pressure Transmitter is a micro processor-based high performance transmitter, which has flexible pressure calibration and output, automatic compensation of ambient temperature and process variable, configuration of various parameters, communication with HART protocol. All Data of Sensor (Tag No., type, range etc.) is to be input, modified and stored in EEPROM.

Function

- » Flexible Sensor Input : GP, AP
- » Various Output : 4 ~ 20mA, Digital Signals
- » Setting Various Parameters : Zero/Span, Trim, Unit, Fail-mode, etc.
- » Self Diagnostic Function : Sensor, Memory A/D Converter, Power, etc.
- » Digital Communication with HART protocol
- » Explosion-proof Approval & Intrinsic Safety Approval : ATEX, FM, FM Canada, GOST, KOSHA, KTL, etc.

Functional Block Diagram

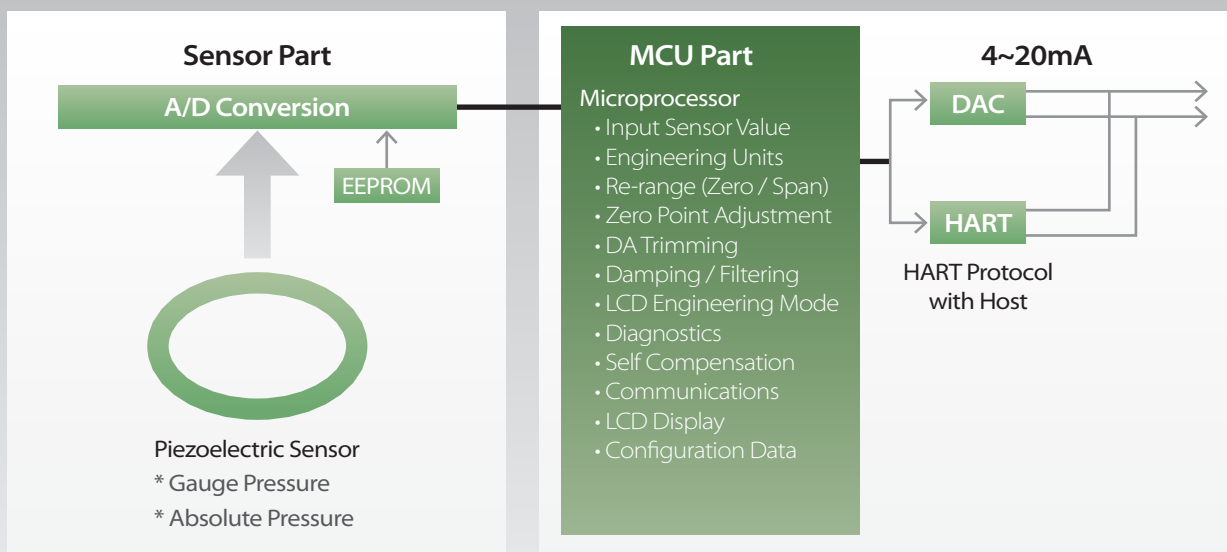

Features

» Superior Performance

- High Accuracy : $\pm 0.075\%$ of Calibrated Span
(option : $\pm 0.04\%$ of Calibrated Span)
- Long-Term Stability
- High Rangeability (100:1)

» Flexibility

- Measuring GP, AP
- Data Configuration with HART configurator

» Reliability

- Continuous Self-Diagnostic Function
- Automatic Ambient Temperature Compensation
- Fail-mode Process Function
- EEPROM Write Protection
- CE EMC Conformity Standards
(EN50081-2, EN50082-2)

Transmitter Description

ATP3200 Pressure transmitter can be easily configured from any host that support the HART protocol.

» Basic Setup

- Operational Parameters.
- 4~20mA Points (Zero/Span)
- Damping Time : 0.25 ~ 60 sec
- Tag : 8 alphanumeric characters
- Descriptor : 16 characters
- Message : 32 characters.
- Date : day/month/year

» Calibration and Trimming

- Lower/Upper Range (zero/span)
- Sensor Zero Trimming
- Zero Point Adjustment
- DAC Output Trimming
- Transfer Function
- Self-Compensation

» Self-Diagnosis and Others

- CPU & Analog Module Fault Detection
- Communication Error
- Fail-mode Handling
- LCD Indication
- Temperature Measurement of Sensor Module

Function

» Range and Sensor Limits

- Refer to Table 1.

» Zero and Span Adjustment Limits

- Zero and span values can be set anywhere within the range limits stated in Table 1.
Span must be greater than or equal to the minimum span stated in Table 1.

» Output (Analog Current and Digital Data)

- Two wire 4~20mA user-configurable for linear, digital process value superimposed on 4~20mA signal, available to any host that conforms to the HART protocol

» Power Supply & Load Requirement

- External power supply required.
Transmitters operate on 12 to 45 V dc.
* 250 ohm load – 17.5 Vdc
* up to a 550 ohm load – 24 Vdc
Max. Loop Resistance = $(E - 12) / 0.022$
(E = Power Supply Voltage)
- Supply Voltage
12 ~ 45 Vdc – operation
17.5 ~ 45 Vdc – HART Communications
- Loop Load
0 ~ 1500 ohm – Operation
250 ~ 550 ohm – HART Communications

» EMC Conformity Standards

- EMI (Emission) – EN50081-2:1993
- EMS (Immunity) – EN50082-2:1995

» Failure Mode

- Fail High : Current ≥ 21.1 mA
- Fail Low : Current ≤ 3.78 mA

» Storage Temperature

- -40°C to 85°C (without condensing)

» Process Temperature Limits

- (Range codes and approval codes may effect limits)
- -40°C to 120°C (-40 to 248°F)

» Isolation

- Input/output isolated to 500Vrms (707 Vdc)

» Working Pressure Limits (silicone oil)

- Model G
-100 ~ 300 KPa - # 3
-100 ~ 3000 KPa - # 4
0 ~ 10,500 KPa - # 5
0 ~ 40,000 KPa - # 6
0 ~ 75,000 KPa - # 7
- Model A
0 ~ 525 KPa - # 4
0 ~ 3000 KPa - # 5
0 ~ 5250 KPa - # 6

Physical Specifications

» Wetted Materials

- Isolating Diaphragms : 316L SST, Tantalum, HAST-C

» Non-wetted materials

- Fill Fluid - Silicone oil (DC200)
- Electronics Housing : Aluminum, SST316L(option)
Flameproof and Waterproof (IP67)
- Cover O-ring - Buna-N
- Paint : Epoxy-Polyester or Polyurethane
- Mounting Bracket : 304SST with U-bolt (304SST)
for 2-inch pipe
- Nameplate - 304 SST

» Process Connections

- 1/2-14 NPT Female
- 1/4-18 NPT (option)

» Electrical connections

- 1/2-14 NPT conduit with M4 Screw Terminals

» Weight

- 1.7 kg (Standard -excluding options)
- 2.83kg (SST Housing- excluding options)

Function

» Change main parameter by Button

- Change Unit
- Change Upper range value
- Change Lower range value
- Change the Damping Second
- Select the Decimal Place
- Zero Trim
- Zero Adjustment

» 5 Digit LCD

- Express all pressure unit.
- Use 5 digit.
- Select decimal place (0 to 4)
- User define unit function



Hazardous Location Certifications (option)

» KOSHA Approvals K1 Code :

* KOSHA: Korea Occupational Safety & Health Agency

Flameproof for Class I, Zone 1 : Ex d 0C T6, IP67

Ambient Temperature : -20 to 60°C

Max. Process Temperature : 80°C

Power Supply : Max. 45 Vdc

Output : 4 to 20 mA + HART, Max. 22 mA

» ATEX Approvals E1 Code :

CE 0344  II 2 G Ex d IIC T6, T5 or T4

Operating Temperature: -20°C ≤ Tamb ≤ +60°C

T6 for process ≤ 85°C ; T5 for process ≤ 100°C

T4 ≤ 130°C

APT3200 ATEX Certification is according to the below

standards : EN 60079-0 : 2006

EN 60079-1 : 2007

» KTL Certification K2 Code :

* KTL: Korea Testing Laboratory

Intrinsic Safety: Ex ia IIC T6

Ambient Temperature : -40 to 60°C

Ui=30Vdc, Ii=200mA, Pi=0.9W, Ci=47nF, Li=94μH

» FM & FM Canada Approvals F1 Code :

* FM: Factory Mutual explosion proof

* FM Canada: Canadian requirements

Explosion proof for Class I, Division 1

Groups A, B, C and D

Dust-ignition proof for Class II, Division 1,

Groups E, F and G

Dust-ignition proof for Class II, Division 1

"T6, see instruction for temperature code if process temperature above 85°C"

Ambient Temperature : -20 to 60°C

Enclosure: indoors and outdoors, NEMA Type 4X

Conduit seal required within 18" for Group A only.

Nonincendive for Class I, Division 2, Groups A, B, C & D;

Class II, Division 2, Groups E, F & G; and Class III, Division 1,


Temperature Code T4

Ambient Temperature : -20 to 60°C


Enclosure: indoors and outdoors, NEMA Type 4X

Supply Voltage : 11.9~42Vdc

Connection Diagram of Signal, Power, HHT for Transmitter

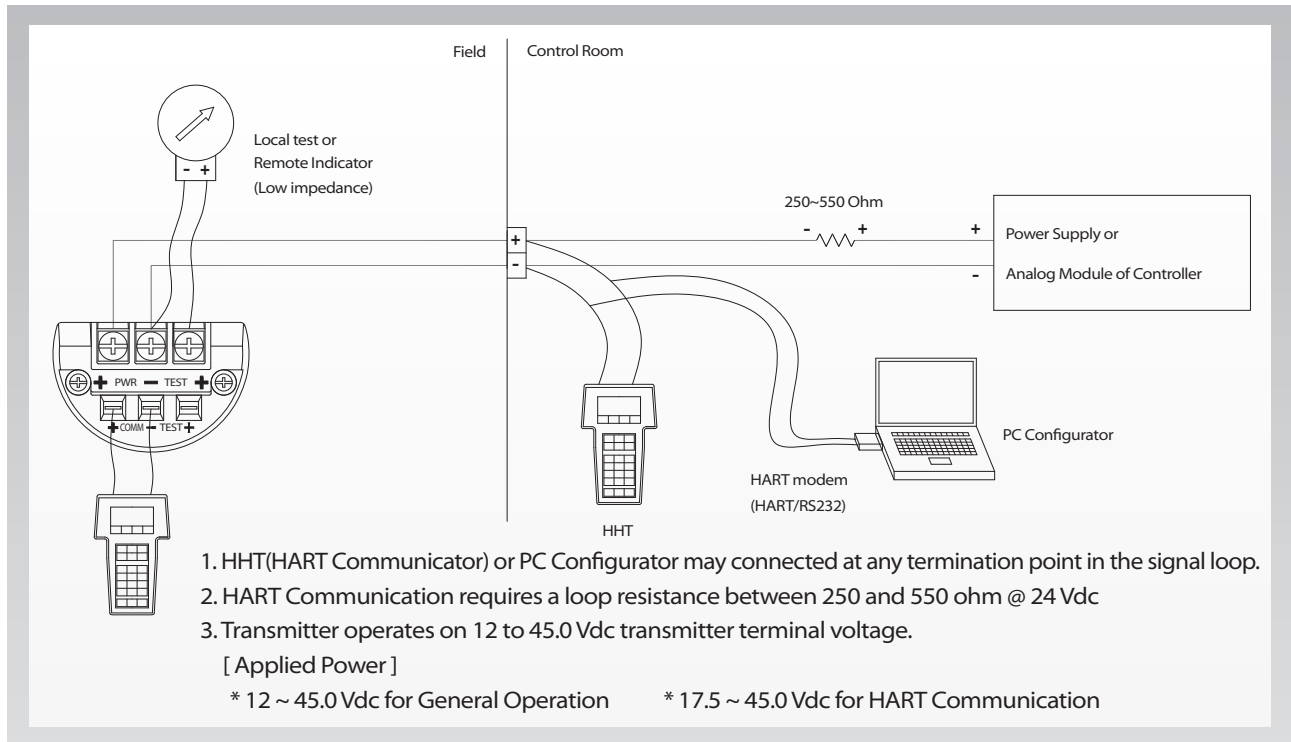

Exploded drawing of APT3200

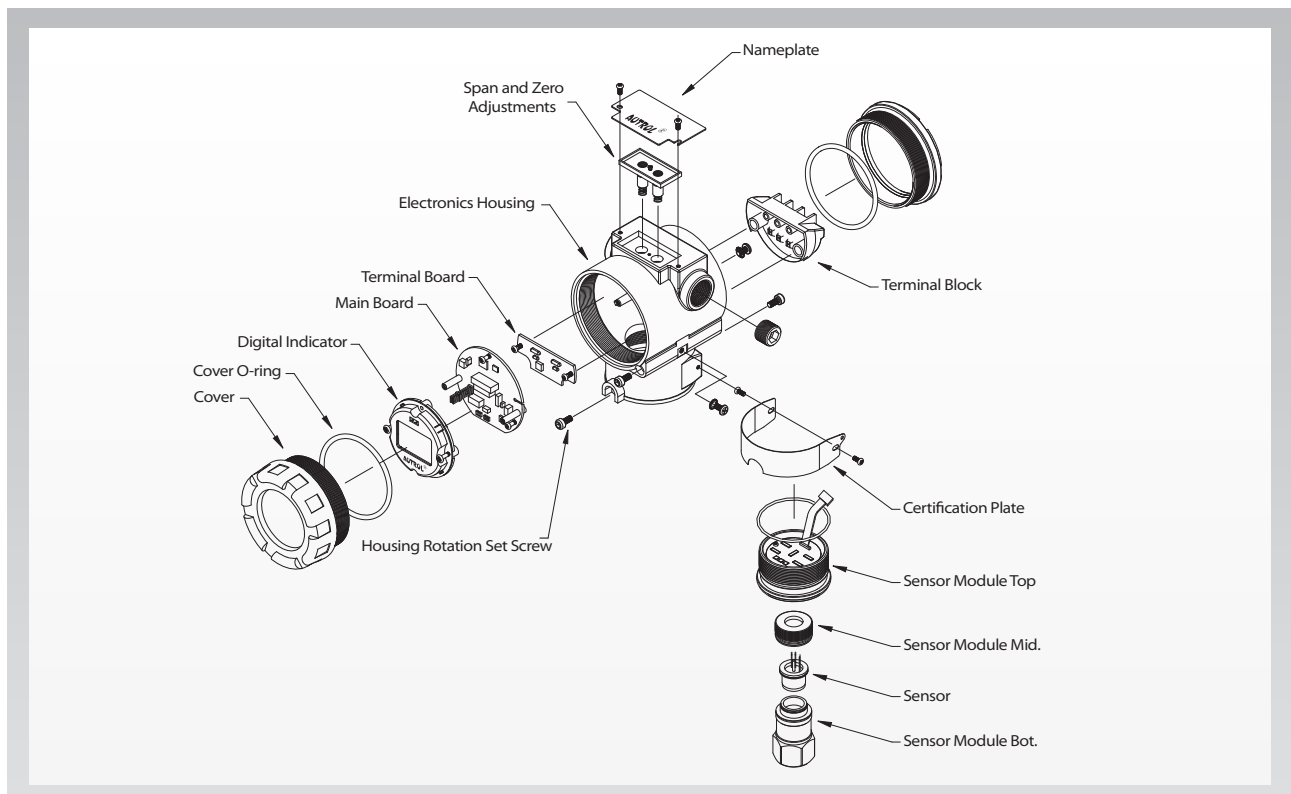

General Specifications

1. APT3200 – G/APressure Sensor Range (Rangeability = 100 : 1)

	APT3200 – G		APT3200 – A	
	Range (KPa)	Calibrated Span (KPa)	Range	Calibrated Span (KPa)
3	-100~150	1.5~150	NA	NA
4	-100 ~ 1,500	15 ~ 1,500	0 ~ 250	2.5 ~ 250
5	0 ~ 5,000	50 ~ 5,000	0 ~ 1,500	15 ~ 1,500
6	0 ~ 25,000	250 ~ 25,000	0 ~ 2,500	25 ~ 2,500
7	0 ~ 60,000	600 ~ 60,000	NA	NA

2. Electrical Specifications

Power Supply	12 ~ 45 Vdc	Output Signal	4 ~ 20 mA dc / HART
HART Loop Resistance	250 ~ 550 ohm	Isolation	500 Vrms (707 Vdc)

3. Performance Specifications

Reference Accuracy	$\pm 0.075\%$ of Span $(0.1 \text{ URL} \leq \text{Span} \leq \text{URL})$ $\pm [0.025 + 0.005 \times (\text{URL}/\text{Span})]\%$ of Span $(0.01 \text{ URL} \leq \text{Span} < 0.1 \text{ URL})$	Ambient Temperature	-40°C ~ +85°C
		LCD Meter Ambient Temp	-30°C ~ + 80°C
		Humidity Limits	5% ~ 100% RH
Ambient Temp. Effect	$\pm [0.019\% \text{ URL} + 0.125\% \text{ Span}] / 28^\circ\text{C}$	Process Temp. Limit	-40°C ~ +120°C
		Power Supply Effect	$\pm 0.005\%$ of Span per Volt
		Stability	$\pm [0.125\% \text{ URL}]$ for 36 months

4. Physical Specifications

Isolating Diaphragm	316L SST	Process Connection Size	1/2 – 14 NPT Female
Electronic Housing	Aluminum	Electrical Connections	1/2 – 14 NPT with M4
Housing Class	Waterproof (IP67)	2" Pipe Stanchion Type Bracket	Angle or Flat type
		Weight (excluding options)	1.7 kg (standard) 2.83kg(SST Housing)

Ordering Information


MODEL	Code	Description				
ATT3200	-G	Gauge Pressure Transmitter (reference accuracy : 0.075 % of span)				
	-A	Absolute Pressure Transmitter (reference accuracy : 0.075 % of span)				
Range		G		A		
		Range (KPa)	Min.Span (KPa)	Range (KPa)	Min. Span (KPa)	
			GP		AP	
	3	-100~150	1.5	NA	NA	
	4	-100 ~ 1,500	15	0 ~ 250	2.5	
	5	0 ~ 5,000	50	0 ~ 1500	15	
	6	0 ~ 25,000	250	0 ~ 2500	25	
	7	0 ~ 60,000	600	NA	NA	
	X	Special				
Mounting Flange Material		DIAPHRAGM		OTHER		
	M11	316L SST		316 SST		
	*M12	HAST-C		316 SST		
	*M13	Tantalum		316 SST		
	*M21	HAST - C		HAST-C		
Hazardous Location Certifications	K0	Maker Standard (Waterproof : IP67)				
	K1	KOSHA Flameproof Approval : Ex d IIC T6		K2	KTL Intrinsic Safety Approval : Ex ia IIC T5	
	E1	ATEX (KEMA) Exponion proof		*E2	ATEX(KEMA) Intrinsic Safety	
	F1	FM & FM Canada Explosion proof		*F2	FM & FM Canada Intrinsic Safety	
Fill Fluid	1	Silicone (DC 200)				
	*2	Inert fill (Halocarbon Oil)				
Process Connection	S	1/2 – 14 NPT Female (standard)				
	O	1/4 - 18 NPT Female (adapter)				
	X	Special				
Electrical Connection	1	1/2-14NPT	Epoxy-Polyester Painted Aluminum			
	*2	G1/2	Epoxy-Polyester Painted Aluminum			
	X	Special				
Option	M1	LCD Indicator				
	LP	Lightening Protector				
	K	Oil Free Finish				
	2W	2 way manifold Remote type				
	BA	Stainless Steel Bracket (Angle type) with SST Bolts				
	BF	Stainless Steel Bracket (Flat type) with SST Bolts				
	ST	Stainless Steel Housing				

Example : APT3200-G5-M11-K0-1-S-1-M1

Note 1 : Request to manufacturer for Draft Range, Absolute (small pressure and vacuum) and Items marked " * " before order.

Dimensions of Transmitter (mm)

Standard Model

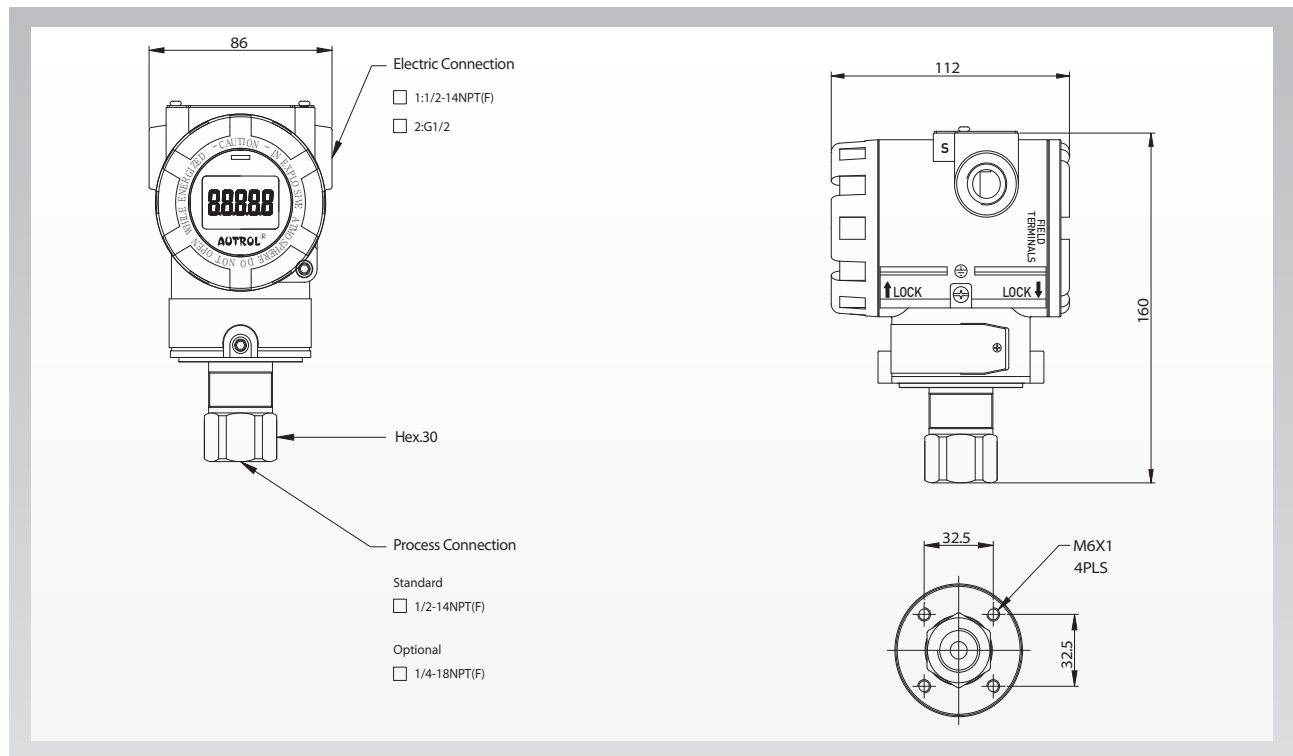

Intrinsically Safe Model

