

Model SSG

Digital Pressure Gauge / Switch

Description

SSG model contains Microprocessor in default. Moreover, it is a Pressure Gauge / Switch with characteristics of LED Display, 1~5VDC or 4~20mA(3wire) Analog Output, 2-Channel RELAY Output. Since it uses IP65 structure, there is no limitation with environmental conditions. As Pressure Sensor, Indicator and Switch are integrated in order to realize providing it at low price

Features

- ▶ CE Certified
- ▶ IP65 Protection
- ▶ LED display(Height 10mm)
- ▶ Built-in amplifier circuit(1~5VDC, 4~20mA)
- ▶ Optional 2-channel Relay switching output
- ▶ Measuring range -0.1~150MPa
- ▶ 0.5~0.8%FS accuracy
- ▶ 18~26VDC excitation voltage

Applications

- ▶ Process control
- ▶ Hydraulics & Pneumatic
- ▶ Compressor Control
- ▶ Chillers
- ▶ Refrigeration Equipment

Specifications




	SSG  / 		SSG  / 	
Range	0~5kPa ... 3.5MPa(Gauge) -100kPa~0 ... 3.5MPa(Gauge) 0~35kPa ... 70MPa(Absolute)		0~5kPa ... 70MPa(Gauge) -100kPa~0 ... 70MPa(Gauge) 0~35kPa ... 70MPa(Absolute)	
Performance				
Accuracy	±0.5%FS ± 1digit		±0.8%FS ± 1digit	
Thermal Effect on Zero	±0.05%FS/°C		±0.08%FS/°C	
Thermal Effect on Span	±0.05%FS/°C		±0.08%FS/°C	
Compensated Temperature Range			-10 ~ 70°C	
Operating Temperature Range			-20 ~ 80°C	
Electrical				
Display			LED(Red Color)	
Max Readout			±1999(3 1/2)	
Height of Digits			10mm	
Excitation			18 ~ 26VDC	
Output				
Switching Signal			2Ch. Relay (5A 28VDC / 10A 125VAC / 5A 250VAC)	
Analog Signal			1~5VDC, 4~20mA(3Wire)	
Electrical Connection	Cable		DIN Connector	
Physical				
Proof Pressure			X1.5 or 150MPa	
Burst Pressure			X2 or 150MPa	
Vibration			49.1m/s ² {5G}, 10~500Hz	
Shock			490m/s ² {50G}	
Pressure Port			R(PT)3/8", Other Connection Available on Request	
Media-Wetted Materials	Stainless Steel, VITON	Stainless Steel, Ti 87%	Stainless Steel, VITON	Stainless Steel, Ti 87%
Protection			IP65	
Weight			Approx. 700g (Standard type only)	

Dimension


► SSGA/SSGC(Standard Type)

● Stand Type

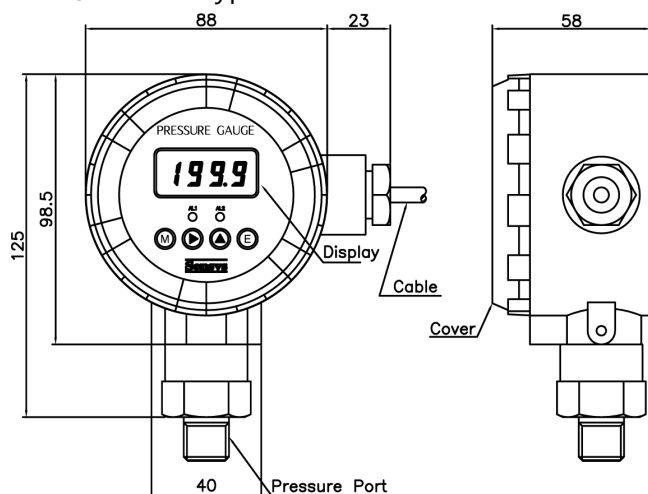

Wire Color	Connections
Red	Input ⊕
White	Common ⊖
Green	Output ⊕
Shield	Earth


● Panel Mounting Type

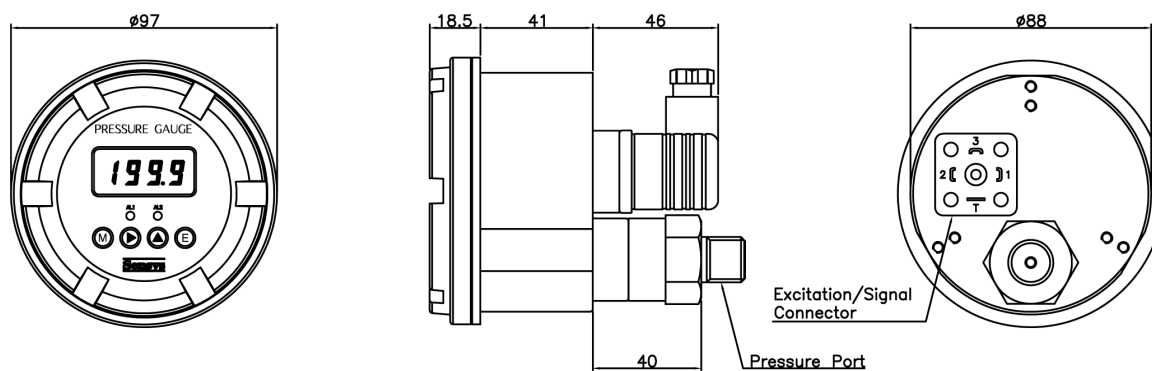

Excitation/Signal Pin No.	Connections
1	Input ⊕
2	Common ⊖
3	Output ⊕
⊕	Earth




► SSGB(Switch Output Type)

● Stand Type

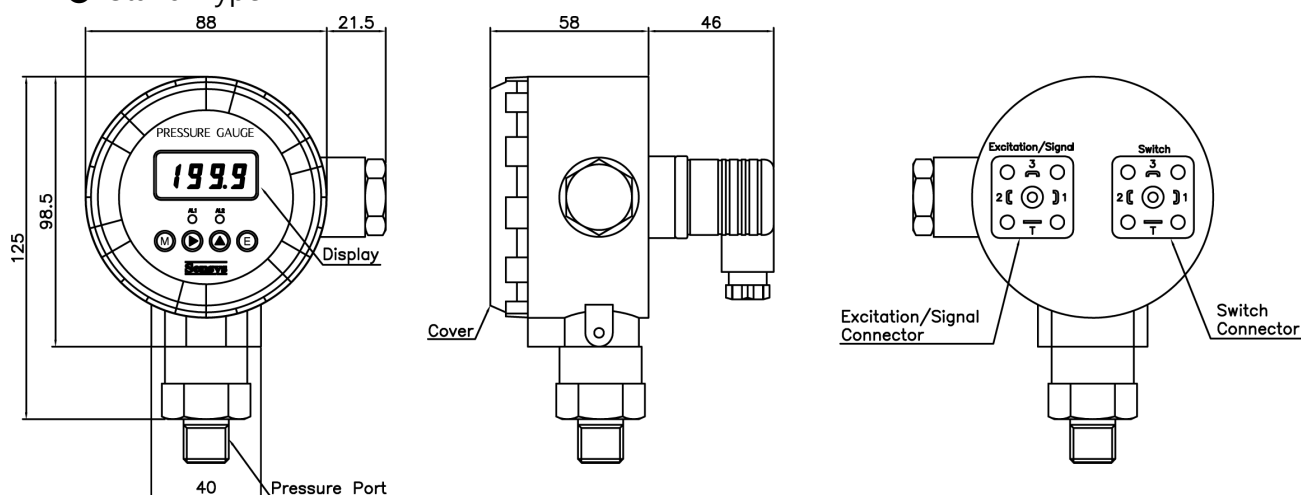

Excitation/Signal Pin No.	Connections	Switch Pin No.	Connections
1	Input ⊕	1	Switch 1
2	Common ⊖	2	Switch 1
3	Output ⊕	3	Switch 2
⊕	Earth	⊕	Switch 2


● Panel Mounting Type

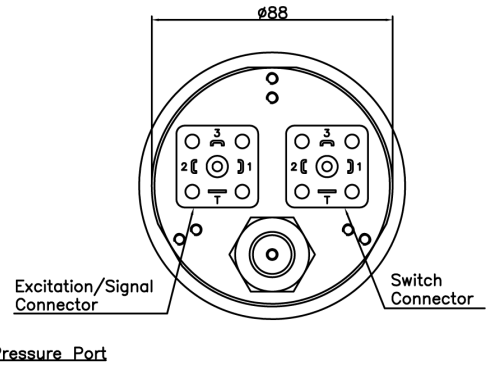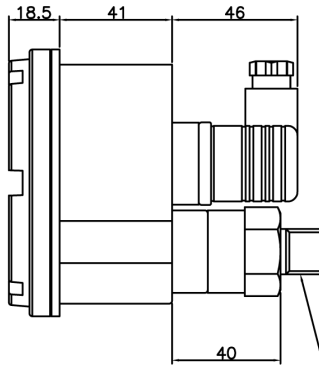


Excitation/Signal Pin No.	Connections	Switch Pin No.	Connections
1	Input⊕	1	Switch 1
2	Common⊖	2	Switch 1
3	Output ⊕	3	Switch 2
⊕	Earth	⊕	Switch 2

Alarm Mode


► Hi Mode




► Low Mode



► A Mode



► B Mode

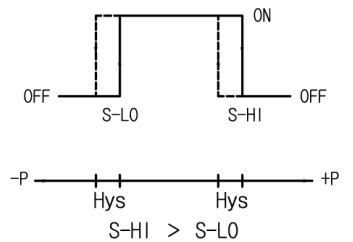

Ordering Information

Model Name

Output

- A : 1~5V
- B : 2-Ch. Relay, 1~5V
- C : 4~20mA(3Wire)
- D : 2-Ch. Relay, 4~20mA(3Wire)

Pressure Range(Display Digit)

- XXXX : Pressure
- CXXX : Compound Pressure

Pressure Unit

- R : kPa
- B : bar
- P : psi
- C : cmH₂O
- M : MPa
- K : kgf/cm²
- H : mmHg

SSG A 01.00 M A A G

Type of Pressure Measurement

- G : Gauge
- J : Absolute

Type

- A : Stand Type
- B : Panel Mounting Type

Pressure port

- A : R(PT)3/8"
- B : G(PF)3/8"
- C : R(PT)1/4"
- D : G(PF)1/4"
- E : R(PT)1/2"
- Q : G(PF)1/2"